


## TopAccess roof access hatch

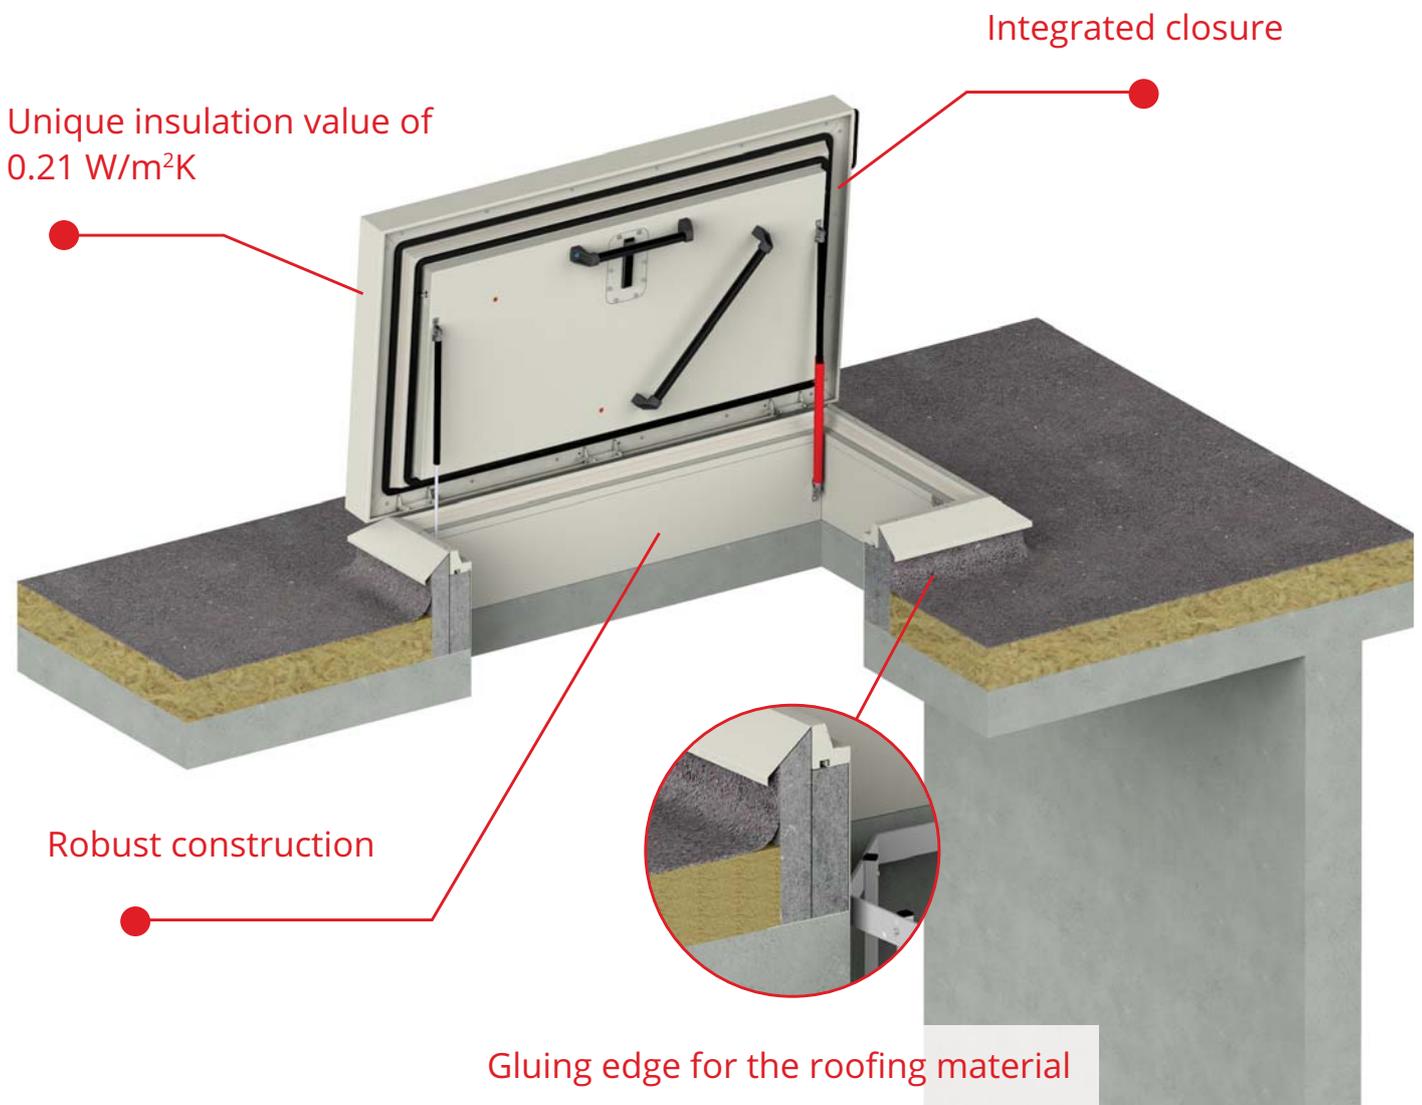

### Outstanding safety and insulation

In office buildings and industrial units, you will need a roof access hatch for practicality; from roof inspections to using roof-top equipment. For these jobs, you need quick, safe, and practical access.



### Usage

- Utility building
- Residential construction
- Renovation projects

### Benefits

- Unique insulation value of 0.21 W/m<sup>2</sup>K
- Constructed using high quality materials
- Certified according to the KOMO quality label

# TopAccess roof access hatch

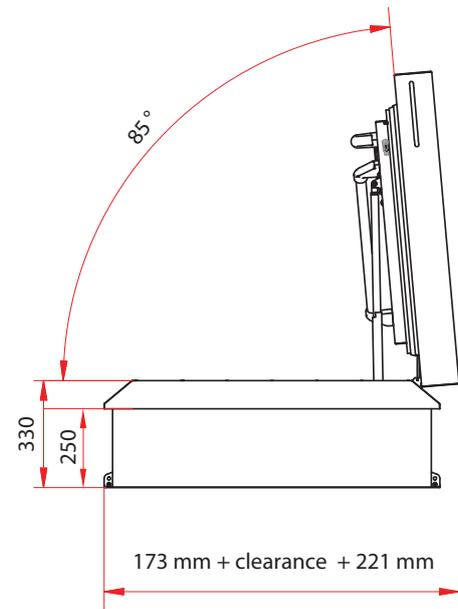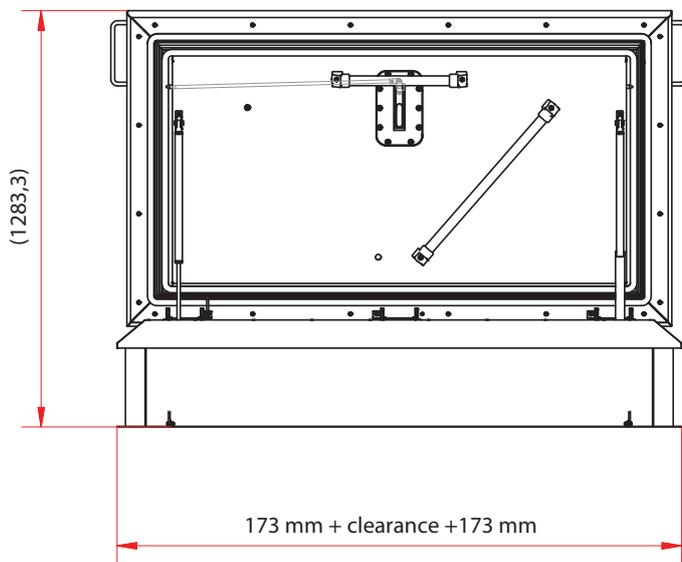

## Specifications of roof access hatch

<b>Insulation value of roof access hatch</b>	U= 0.21 W/m <sup>2</sup> K in accordance with EN-ISO10077-2
<b>Available clearances</b>	900 x 700 – 900 x 900 - 1400 x 700 – 1500 x 900 - 2400 x 900 mm
<b>Required roof opening</b>	900 x 700 – 900 x 900 - 1400 x 700 – 1500 x 900 - 2400 x 900 mm
<b>Material</b>	Stainless steel (AISI 304 or equivalent)
<b>Insulation material</b>	Insulation material with an R-value of 7.22 m <sup>2</sup> K/W Fitted with a glass fibre protective top layer Suitable for every type of roofing material
<b>Sound insulation</b>	23 dB in accordance with EN-ISO 10140-1
<b>Wind load</b>	2400 Pa in accordance with EN 12211
<b>Watertightness</b>	750 Pa in accordance with EN 12155
<b>Snow load</b>	950 N/m <sup>2</sup> in accordance with EN 1991-1-3
<b>Impact load</b>	0.35 kNm in accordance with EN 1991-1-1
<b>Air permeability</b>	Up to a test pressure of 650 Pa. Pa 0.37 m <sup>3</sup> /h at 10, in accordance with EN 1026
<b>Surface treatment</b>	RAL 9010 powder coating, other colours are available on request.
<b>Closure</b>	Two-point closure with europrofile cylinder, including two keys (interchangeable, 30/10 cylinder)
<b>Operation</b>	Powerful gas pressure springs ensure that the cover can be easily opened and closed. Automatic locking in open position
<b>Safety</b>	Two handles and diagonal handrail on inside of cover for support while accessing and leaving the roof.
<b>Options</b>	Electric control
<b>Application</b>	Maximum pitch of 40 degrees
<b>Certification</b>	TÜV certified
<b>Guarantee</b>	Ten years